


Configurations



Stallion Cartage Tanks come in a range of spray configurations for your dust suppression needs.


Premium Spray Unit

- Honda GX160 electric start in roll cage
- 2" firefighting pump – maximum free
- Delivery 490 lpm at 100 psi
- Variable pressure valve
- 2 X batter Sprays
- 1 X 32mm galvanised dribble bar with six fixed angle spray nozzles on split eyelet connectors.
- All nozzles have ball valves.
- Camlock fittings on hoses and Batter spray nozzles.

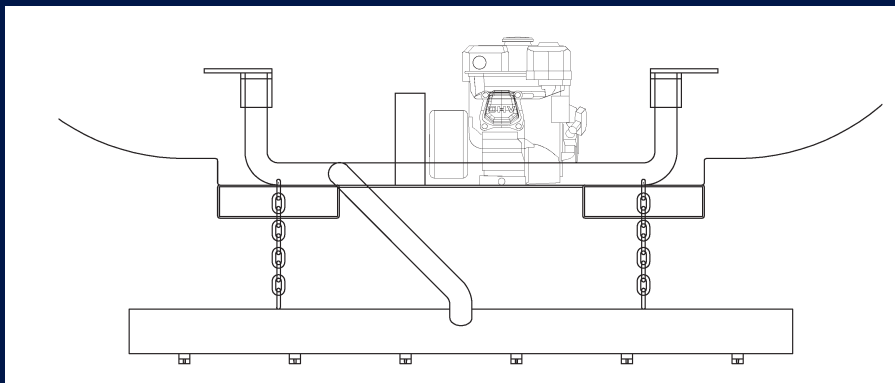


Standard Spray Unit

- Honda GX160 electric start in roll cage
- 2" firefighting pump – maximum free
- Delivery 490 lpm at 100 psi
- Variable pressure valve
- 2 X batter Sprays
- All nozzles have ball valves.
- Camlock fittings on hoses and Batter spray nozzles.

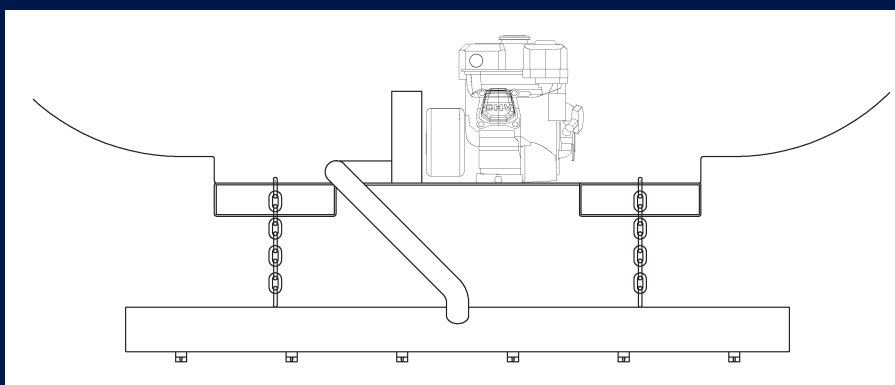

Dust Suppression Unit

- Honda GX160 electric start in roll cage
- 2" firefighting pump – maximum free
- Delivery 490 lpm at 100 psi
- Variable pressure valve
- 1 X 32mm galvanised dribble bar with six fixed angle spray nozzles on split eyelet connectors
- All nozzles have ball valves
- Camlock fittings on hoses and Batter spray nozzles.

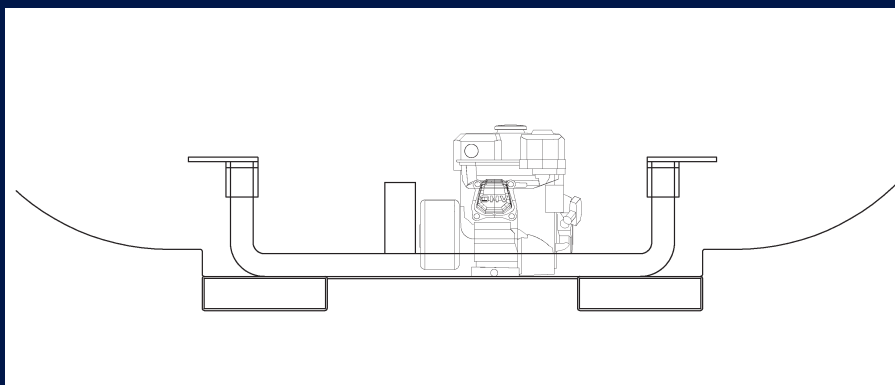

Stallion Cartage Tank Sizing Charts

All Applications and Industries

Capacity (L)	Length (mm)	Width (mm)	Height (mm)
800	1500	1300	674
1500	2000	1400	874
2500	2200	1900	874
5500	2500	2350	1354
7500	3300	2350	1354
9500	4100	2350	1354
13500	5700	2350	1354
15000	5700	2350	1500

